



Leverage from  
the EU  
2014–2020

European Union  
European Regional  
Development Fund




# HEMISPHERICAL UNDERGROUND BOREHOLE HEAT EXCHANGER FIELD AS A SOURCE OF GEOTHERMAL ENERGY

**Kimmo Korhonen**, Jaakko Hietava, and Lasse Ahonen


*Geological Survey of Finland*

*[kimmo.korhonen@gtk.fi](mailto:kimmo.korhonen@gtk.fi)*




# WHY A HEMISPHERICAL UNDERGROUND BOREHOLE HEAT EXCHANGER (BHE) FIELD?

- Significant benefits in heating energy production can be gained by going from the cold ground surface to the warmer deep ground
- The soon-to-be decommissioned Pyhäsalmi Zn/Cu mine in central Finland offers access to the warmer deep ground where the geothermal resource is significantly higher than at the shallow ground
- Mine tunnels and underground spaces do not offer much possibility to construct conventional BHE fields with vertical boreholes
- However, a large BHE field can be constructed by drilling from a central space out into a hemispherical volume
- We wanted to see if it is possible to construct a hemispherical BHE field (using open loop coaxial BHEs) that is large enough to provide heating power of at least 1 MW and approximately 1 TWh of heating energy during its lifecycle

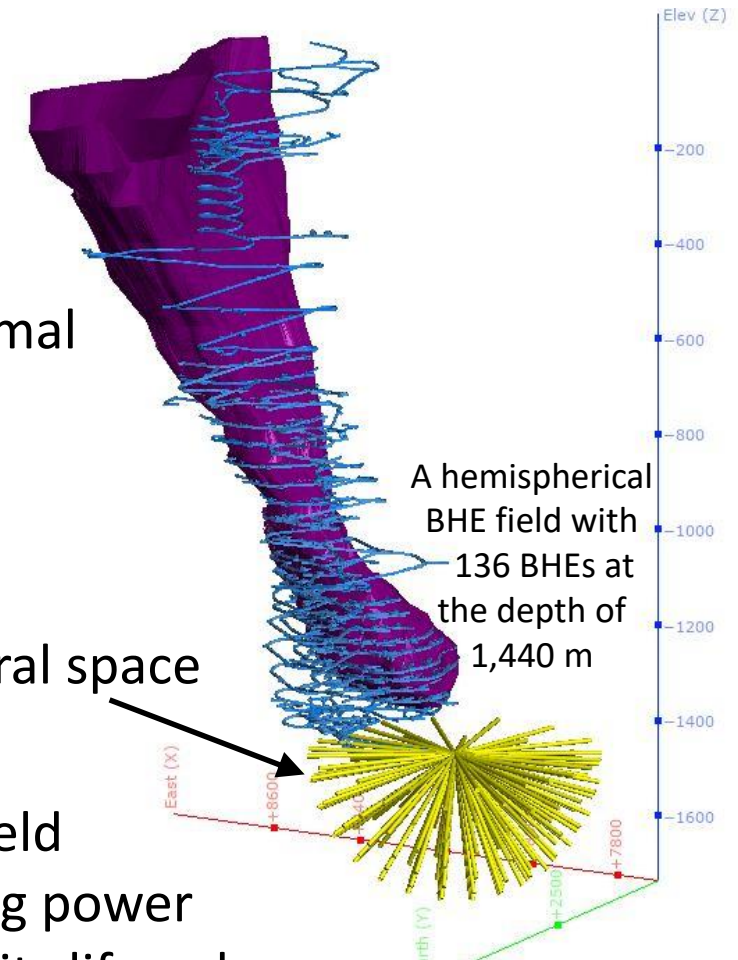



# THE BHE FIELD GEOMETRY AND NUMERICAL MODEL

- The most optimal geometry for a hemispherical BHE field is such in which each of the BHEs extract heat from an equally large volume of rock (i.e. the BHEs are equispaced)
- Such a geometry can be created with the help of a geodesic sphere (which is a sphere made from triangles that have approximately equally long edges)

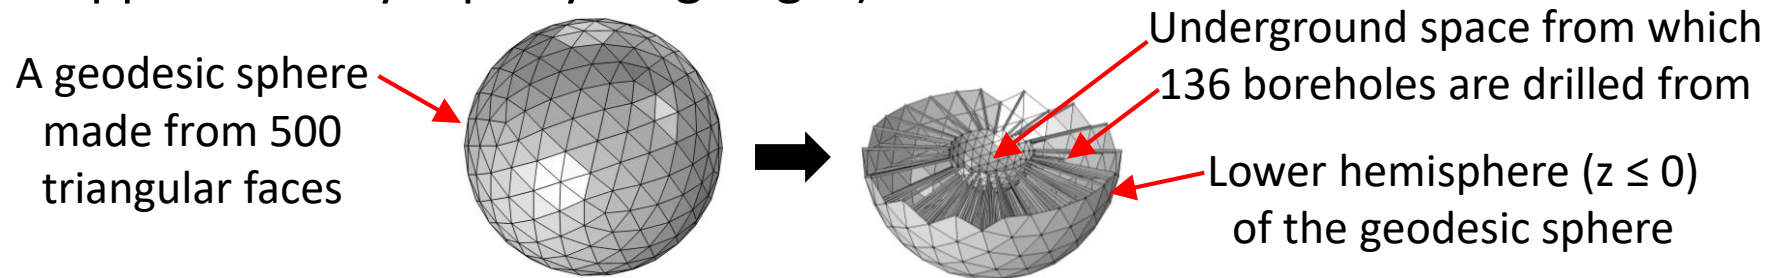


- COMSOL Multiphysics® v5.5 was used to simulate the operation of the BHE fields
- Finite element models with quarter symmetry were created

Full 3D model  
with 136 BHEs

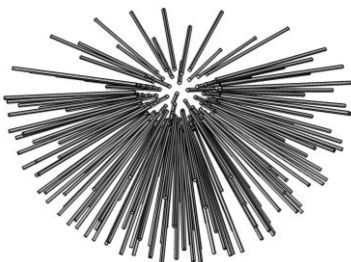

Model that takes symmetry  
into account (39 BHEs)


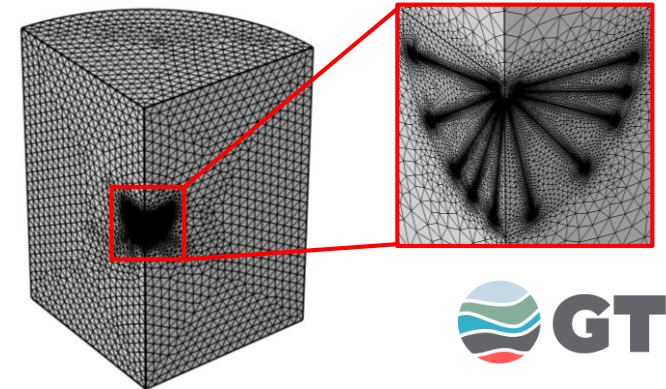


# EXTRACTING THERMAL ENERGY STORED IN THE BEDROCK

- A hemispherical BHE field that has the radius of  $r$  (i.e. the length of BHEs is  $r$ ) and where a 2 °C fluid is circulated has access to a thermal energy storage of the size of

$$E = \rho \cdot C_p \cdot \frac{1}{2} \cdot \frac{4}{3} \pi r^3 \cdot (T - 2 \text{ °C})$$

- The BHE density (the number of BHEs per volume) determines how much of the storage can be extracted using the BHE field
- A simulation reveals that a hemispherical BHE field with 136 BHEs having the length of 300 m can extract 86 % (942 GWh) of the heat storage of 1,099 GWh
- Once the BHE field has extracted all the stored heat that it can access, a new steady state is reached with a sustainable heating power of 162 kW coming from the geothermal heat flux

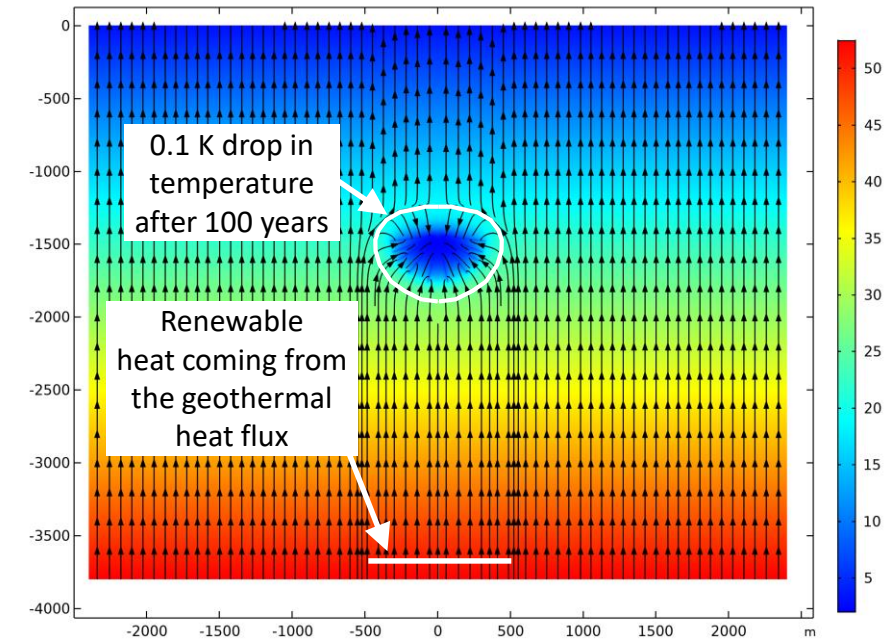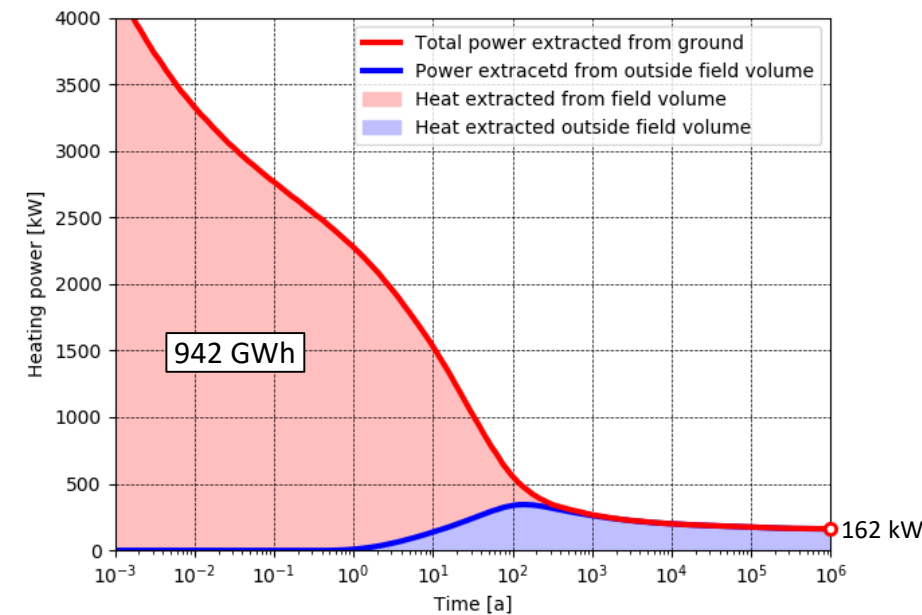



# INFLUENCE OF THE HEAT EXTRACTION RATE

- The heat stored in the bedrock can be extracted either fast or slow
- Simulations indicate that BHE fields with 136 BHEs can sustain the heat extraction rate of 1 MW for at least 44 years (before the fluid temperature in the BHE field cools too much to sustain the desired heat extraction rate)
- Simulations show that extracting heat using the rate of 2 MW will deplete the BHE field significantly faster and to sustain this level of heat extraction for a significant period of time will require increasing the volume of the field (e.g. from a field of 300-m BHEs to a field of 500-m BHEs)

